




OPEN COUNTRY M/T

PERFORMANCE RATING

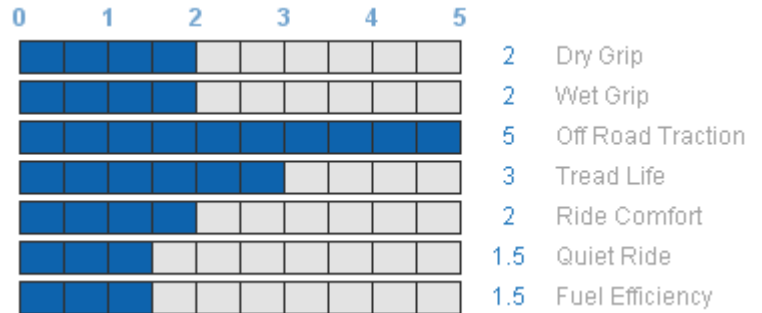

The **Open Country M/T** is a light truck construction SUV tyre designed to provide exceptional performance in muddy/soft terrain off-road conditions.

FEATURES

Aggressive, high void ratio, block type tread pattern

Tread blocks extend to tyre shoulder / upper sidewall

3-ply polyester carcass with high turn-up ply

Spiral cap plies and jointless bead wire

BENEFITS

High levels of traction and excellent self-cleaning in mud and other loose surfaces

High levels of traction in deep ruts and with low inflation pressures for rock climbing

High resistance to sidewall bruising, sharp steering response and excellent stability

Excellent uniformity

TYRE SIZE & SERVICE DESCRIPTION	TREAD DEPTH (mm)	INFLATED DIM.		LOADED DIMENSION			TEST RIM (INCH)	REVS PER KM.	APPROVED RIM WIDTH CODES (INCH)	
		O.D. (mm)	O.W. (mm)	STATIC RADIUS	STATIC WIDTH	DYNAMIC RADIUS				
33x12.50R15 108P	16.7	840	325	391	340	408	10.0	390	8.0	- 11.0
35x13.50R15 114Q	16.7	885	365	387	398	430	11.0	370	8.5	- 11.0
LT305/70R16 124P	15.9	840	310	391	320	408	9.0	390	8.0	- 10.0
LT225/75R16 115P	13.5	748	220	336	204	363	6.0	438	6.0	7.0
LT245/75R16 120P	14.6	782	253	365	268	380	7.0	419	6.5	- 8.0
LT265/75R16 123P	15.0	810	275	377	290	394	7.5	404	7.0	- 8.0
LT285/75R16 126P	15.2	839	295	390	305	408	8.0	390	7.5	- 9.0
LT315/75R16 127Q	16.7	886	327	412	341	431	8.5	370	8.0	- 11.0
LT235/85R16 120P	14.6	813	240	378	260	395	6.5	403	6.0	- 7.5

TYRE SIZE & SERVICE DESCRIPTION	TREAD DEPTH (mm)	INFLATED DIM.		LOADED DIMENSION			TEST RIM (INCH)	REVS PER KM.	APPROVED RIM WIDTH CODES (INCH)	
		O.D. (mm)	O.W. (mm)	STATIC RADIUS	STATIC WIDTH	DYNAMIC RADIUS				
LT255/85R16 123P	15.0	846	255	375	278	411	7.0	385	6.5	- 8.0
LT265/65R17 120P	15.0	782	272	352	296	380	8.0	419	7.5	- 9.5
LT265/70R17 121P	15.0	813	275	378	290	395	8.0	403	7.0	- 8.5
LT295/70R17 128P	15.5	852	299	380	326	414	8.5	384	7.5	- 10.0
33x12.50R18 118Q	16.7	832	318	375	347	404	10.0	394	8.5	- 11.0
35x12.50R18 123Q	16.7	883	318	395	347	429	10.0	371	8.5	- 11.0
37x13.50R18 124Q	16.7	941	360	438	378	457	11.0	348	8.5	- 11.0
33x12.50R20 114Q	16.7	832	318	380	347	404	10.0	394	8.5	- 11.0